


Poly Flex Data Sheet

Product: Steel Half Coupling

Series: Taper Lock

Model: 534 Taper Lock Half Coupling





<u>Material Specification</u>	
· CNC Lathe - CS1020 Steel	
· All Metal Parts - SA5 Cobalt Zinc Plated	

<u>Weight Of Coupling</u>	
Kg	lbs
3.3	7.275

<u>Available Shaft Sizes</u>	
Metric	Inches
22mm to 44.45mm	7/8" to 1 3/4"

<u>Transmission Cross Reference</u>	
Yanmar / Kansaki / 5" Flange	
30 G, 30 H, 30 M, KBW 20, KBW 21, KM 4, KMH 4, KMH 4 A, KM 4 A-2,	

<u>Bolt Torque Settings</u>	
lb-ft	N-m
28	39

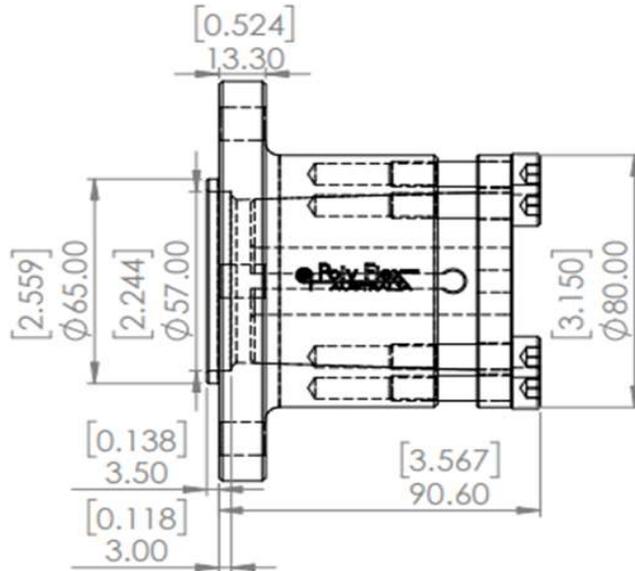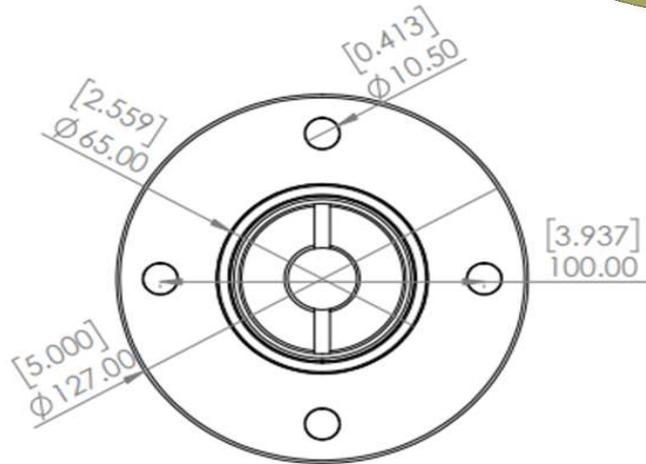

The following data is supplied as a guide only. Specifications are subject to change without notice.

Date: 14/06/23

Copyright © 2022 Poly Flex Group Pty Ltd.



26 - 28 Tubbs Street Clontarf, Qld. 4019. Australia
 07 3284 2799 : Int Code +61
 info@polyflex.com.au
 www.polyflex.com.au



MARINE . MINING . DEFENCE . INDUSTRIAL . COMMERCIAL . AGRICULTURAL . AUTOMOTIVE
 Australian Made Quality & Performance that is Second to None