
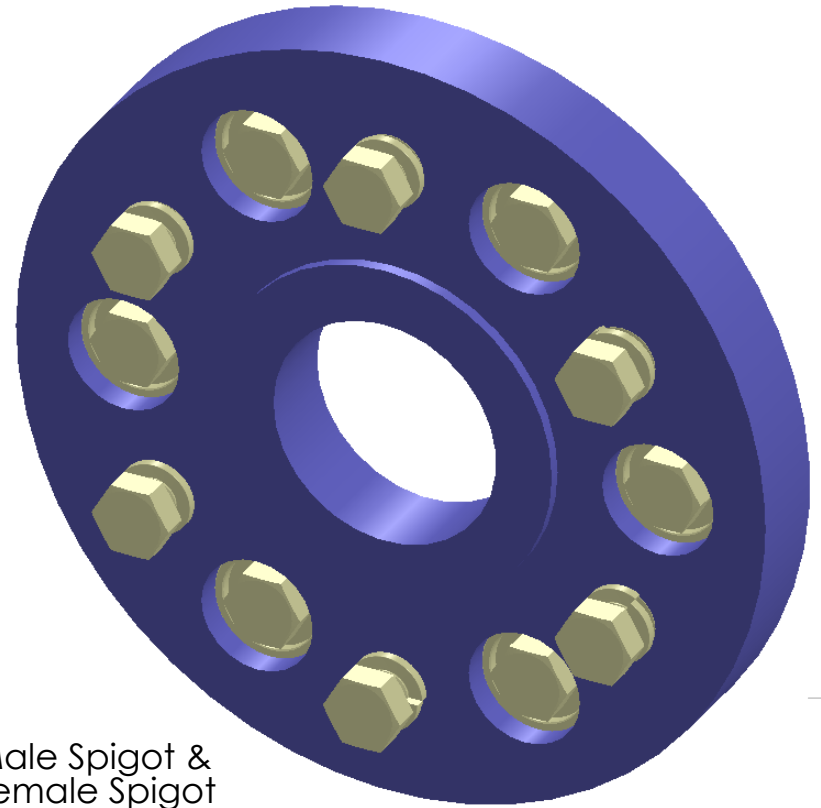


① Coupling Disc - ENG Grade polymer alloy (Heat Cured) - 1 off

② M20 X 50mm Hex Bolt & S/W - Bolt Grade 8 HT - 6 off

③ M20 x 65mm Hex Bolt, Nut & S/W - Bolt Grade 8 HT - 6 off

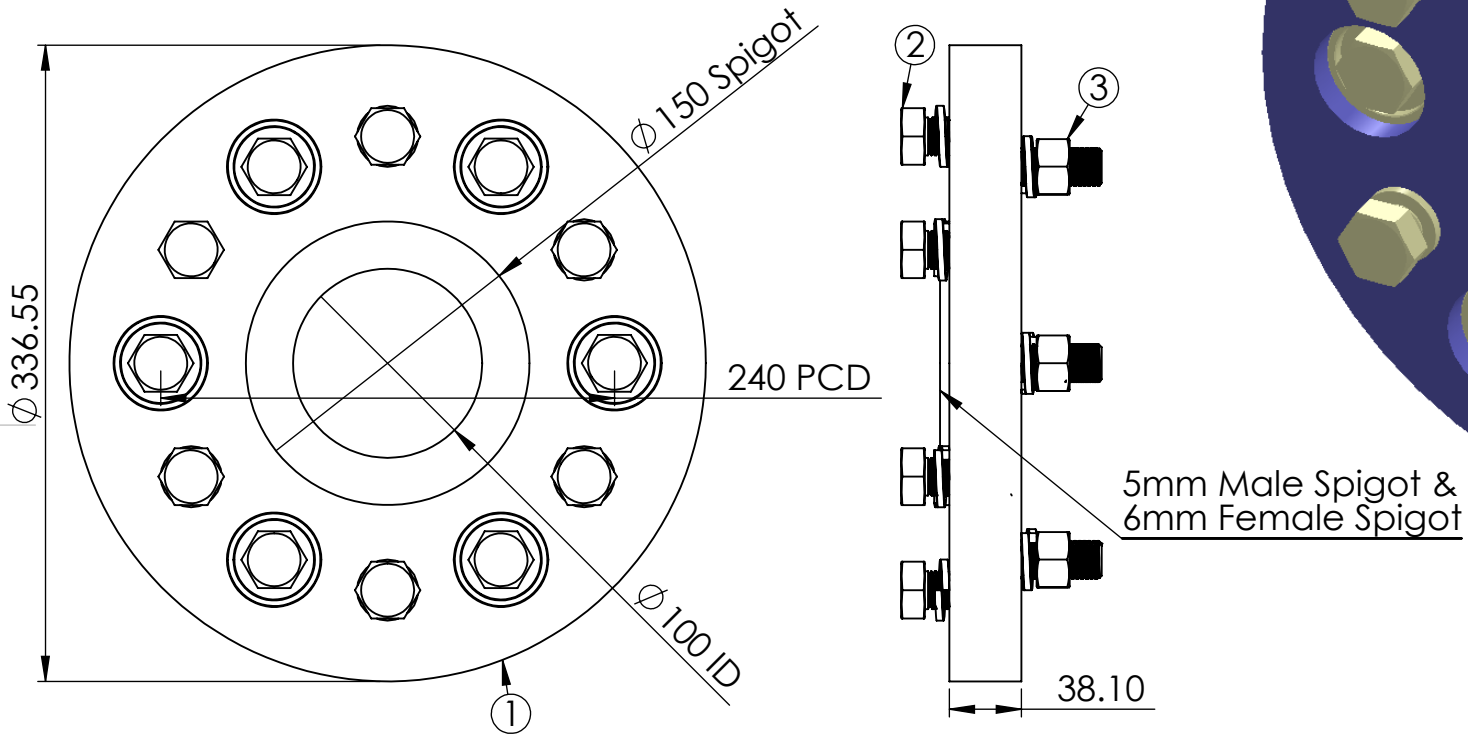

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN MILLIMETERS
SURFACE FINISH:
TOLERANCES:
LINEAR: ± 0.25
ANGULAR: ± 0.25

Part Number

DO NOT SCALE DRAWING

REVISION A

COMMENTS:

Suits: Dong-I DMT 260H, DMT 280H

TITLE:

Poly Flex Flexible Coupling
20150-4-95

DWG NO.

20150-4-95 Flexible Coupling

A4

PROPRIETARY & CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF
POLY FLEX GROUP PTY LTD. ANY REPRODUCTION IN PART OR AS A WHOLE
WITHOUT THE WRITTEN PERMISSION OF POLY FLEX GROUP PTY LTD IS PROHIBITED.

	NAME	SIGNATURE	DATE
DRAWN	O.Knust		4/06/2013
CHK'D	O.Knust		4/06/2013
APPV'D			
MFG			
Q.A			

MATERIAL:

95A Urethane

WEIGHT:

SCALE:1:5

SHEET 1 OF 1