
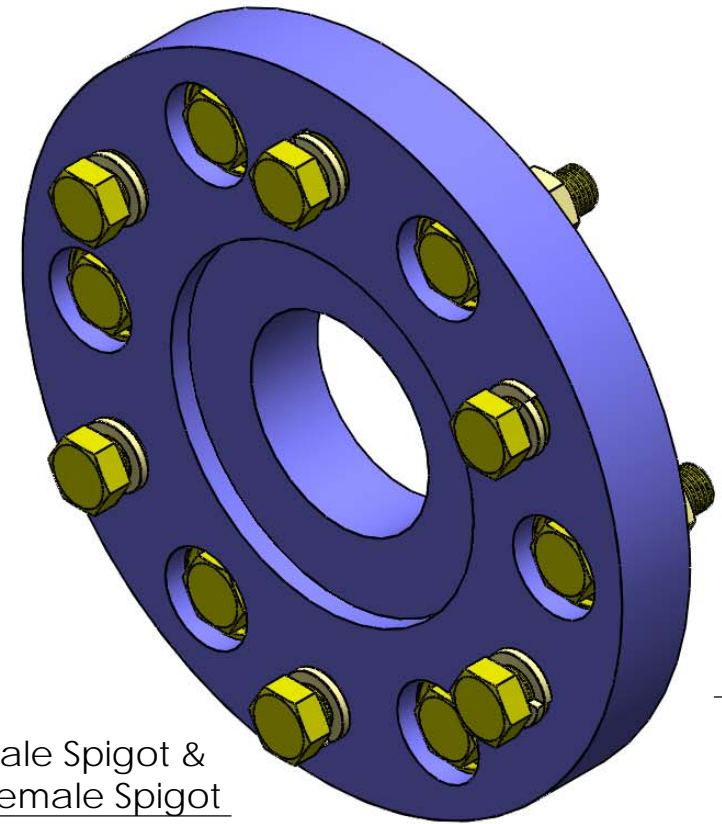


- ① Coupling Disc - ENG Grade polmeralloy (Heat Cured) - 1 off
- ② M20 x 50mm Hex Bolt, Nut & S/W - Bolt Class 8.8 H/T - 6 off
- ③ M20 x 65mm Hex Bolt & S/W - Bolt Class 8.8 H/T - 6 off

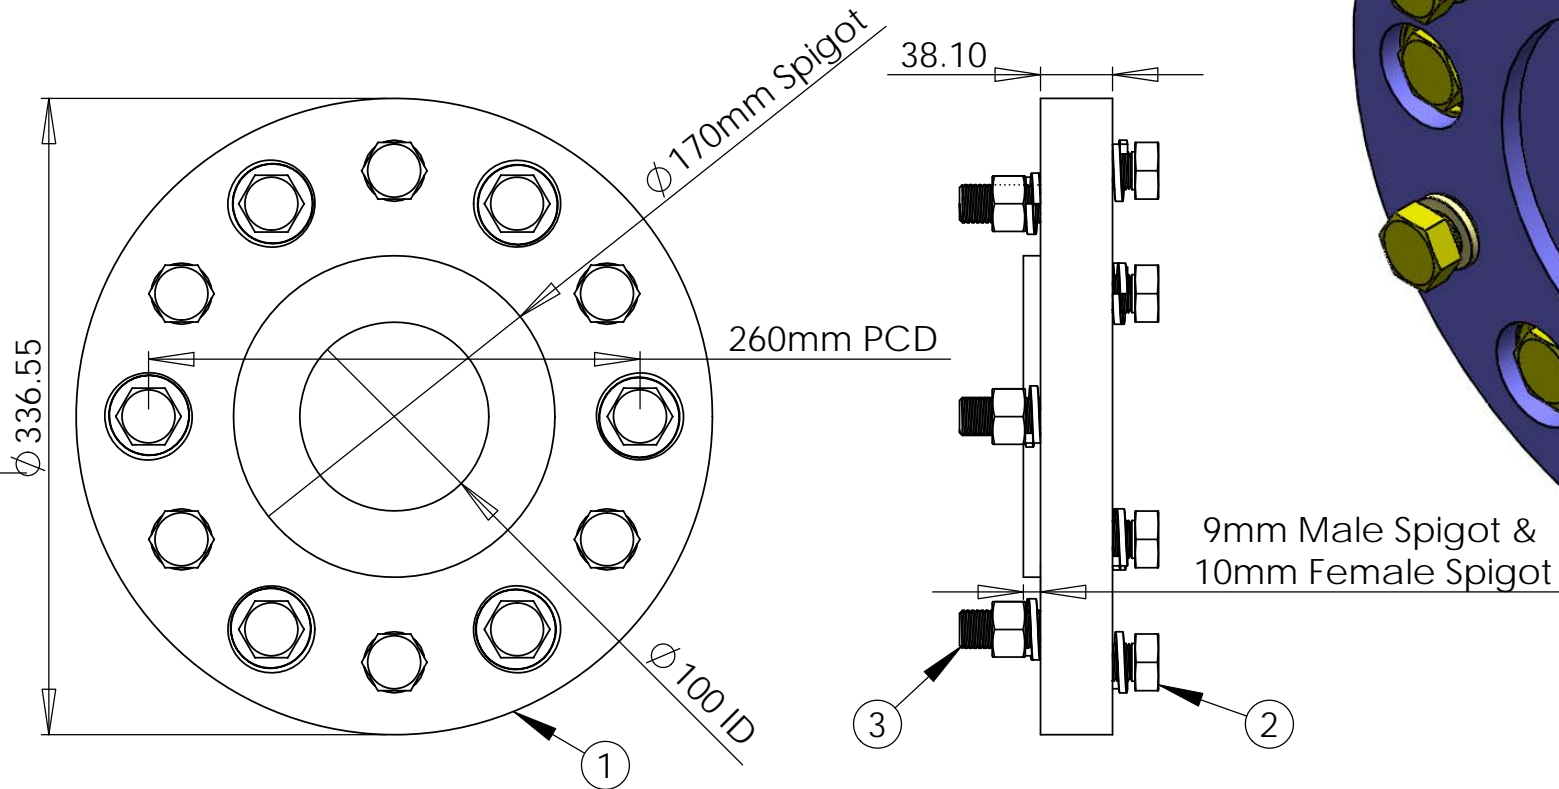

UNLESS OTHERWISE SPECIFIED:  
 DIMENSIONS ARE IN MILLIMETERS  
 SURFACE FINISH:  
 TOLERANCES:  
 LINEAR:  $\pm 0.25$   
 ANGULAR:  $\pm 0.25$

DO NOT SCALE DRAWING REVISION A

COMMENTS:

TITLE:  
**2306-4-95 Flexible Coupling  
 95 Blue**

	NAME	SIGNATURE	DATE
DRAWN	O.Knust		19/08/2009
CHK'D	O.Knust		19/08/2009
APPV'D			
MFG			
Q.A			

MATERIAL:  
**95 Duro Poly Urethane**

DWG NO. **2306-4-95 Flexible Coupling** A4

**PROPRIETARY & CONFIDENTIAL**  
 THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF  
 POLY FLEX GROUP PTY LTD. ANY REPRODUCTION IN PART OR AS A WHOLE  
 WITHOUT THE WRITTEN PERMISSION OF POLY FLEX GROUP PTY LTD IS PROHIBITED.