

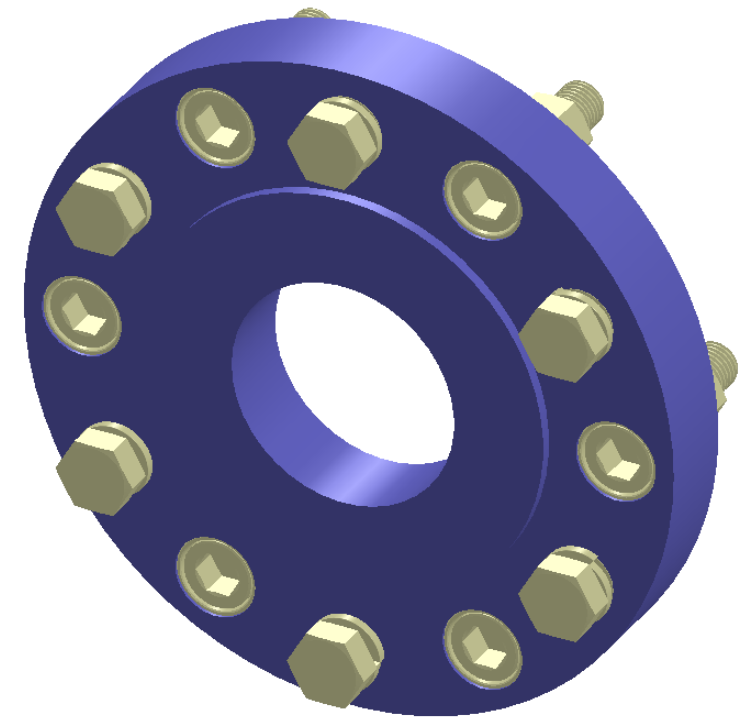
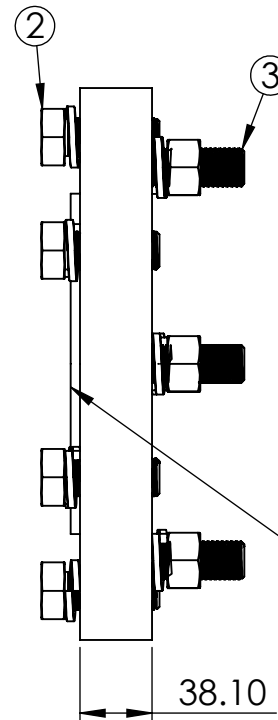


- ① Coupling Disc - ENG Grade polymer alloy (Heat Cured) - 1 off
- ② M20 X 50mm Hex Bolt & S/W - Bolt Grade 8 HT - 6 off
- ③ M20 x 65mm SHCS, Nut & S/W - Bolt Grade 8 HT - 6 off

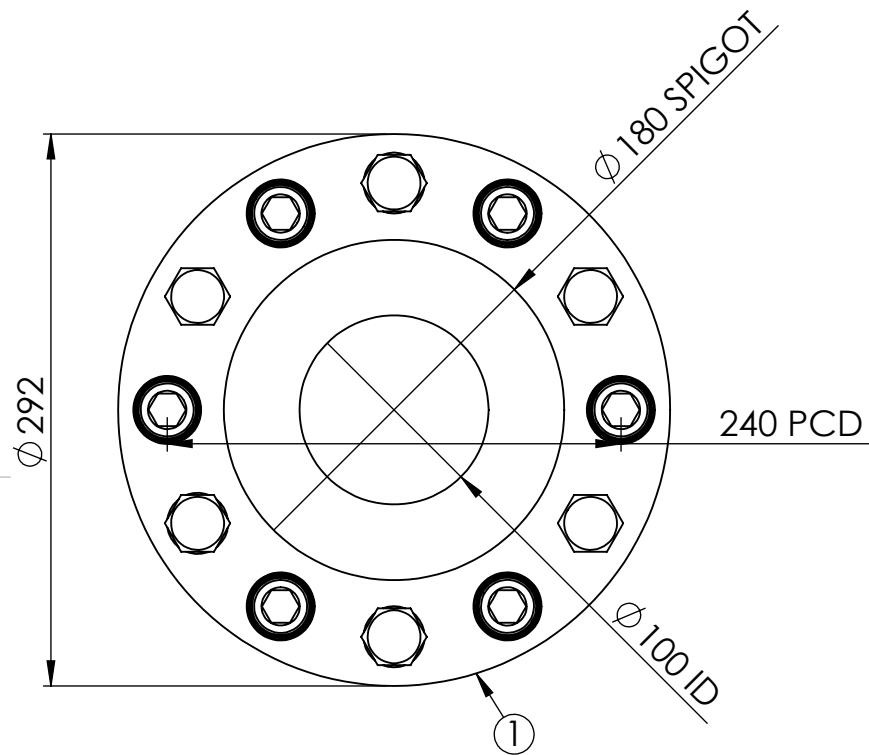

5mm Male Spigot &
6mm Female Spigot

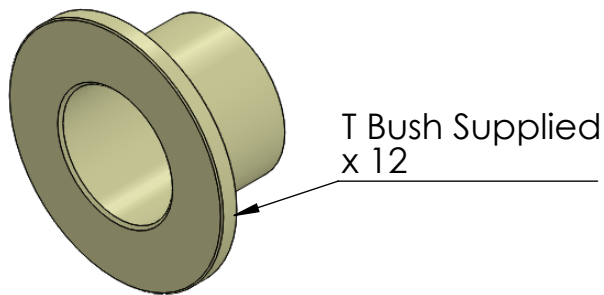

T Bush Supplied
x 12

PROPRIETARY & CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF
POLY FLEX GROUP PTY LTD. ANY REPRODUCTION IN PART OR AS A WHOLE
WITHOUT THE WRITTEN PERMISSION OF POLY FLEX GROUP PTY LTD IS PROHIBITED.



UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN MILLIMETERS
SURFACE FINISH:
TOLERANCES:
LINEAR: +/-0.25
ANGULAR: +/-0.25

Part Number

	NAME	SIGNATURE	DATE
DRAWN	O.Knust		3/02/2015
CHK'D	O.Knust		3/02/2015
APPV'D			
MFG			
Q.A			

MATERIAL:
95A Urethane

WEIGHT:

DO NOT SCALE DRAWING

REVISION A

COMMENTS:

Suits: Dong-I DMT 400H

TITLE:

Poly Flex Flexible Coupling
24180-4-95 M20

DWG NO.

24180-24M-4-95 Flexible Coupling

A4

SCALE:1:5

SHEET 1 OF 1