


- ① Coupling Disc - ENG Grade polymer alloy (Heat Cured) - 1 off
- ② M24 X 70mm Hex Bolt & S/W - Bolt Grade 8 HT - 8 off
- ③ M24 x 100mm Hex Bolt, Nut & S/W - Bolt Grade 8 HT - 8 off

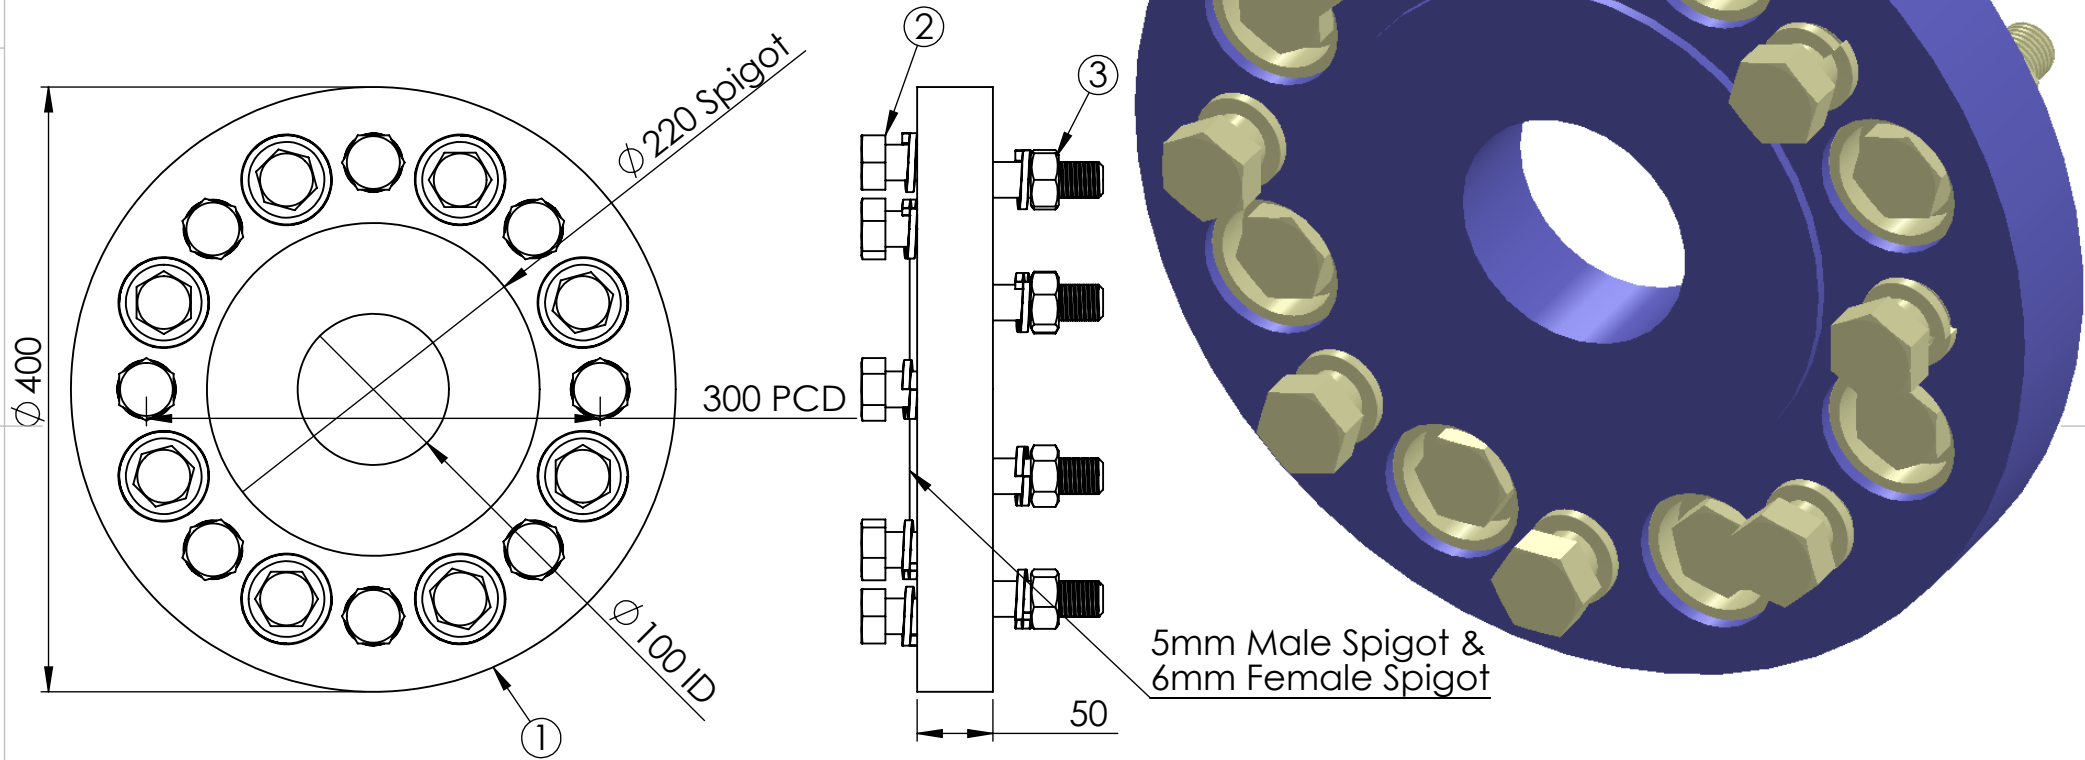

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN MILLIMETERS
SURFACE FINISH:
TOLERANCES:
LINEAR: +/-0.25
ANGULAR: +/-0.25

DO NOT SCALE DRAWING
REVISION A

COMMENTS:
Suits: Dong-I DMT 400HL, DMTP 6500

TITLE:
**Poly Flex Flexible Coupling
24220-4-95 M24**

	NAME	SIGNATURE	DATE
DRAWN	O.Knust		5/06/2013
CHK'D	O.Knust		5/06/2013
APPV'D			
MFG			
Q.A			

MATERIAL:
95A Polyurethane

DWG NO. 24220-24M-4-95 Flexible Coupling
A4

PROPRIETARY & CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF POLY FLEX GROUP PTY LTD. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF POLY FLEX GROUP PTY LTD IS PROHIBITED.