



- ① Coupling Disc - ENG Grade polymer alloy (Heat Cured) - 1 off
- ② M20 X 50mm Hex Bolt & S/W - Bolt Grade 8 HT - 6 off
- ③ M20 x 65mm Hex Bolt, Nut & S/W - Bolt Grade 8 HT - 6 off

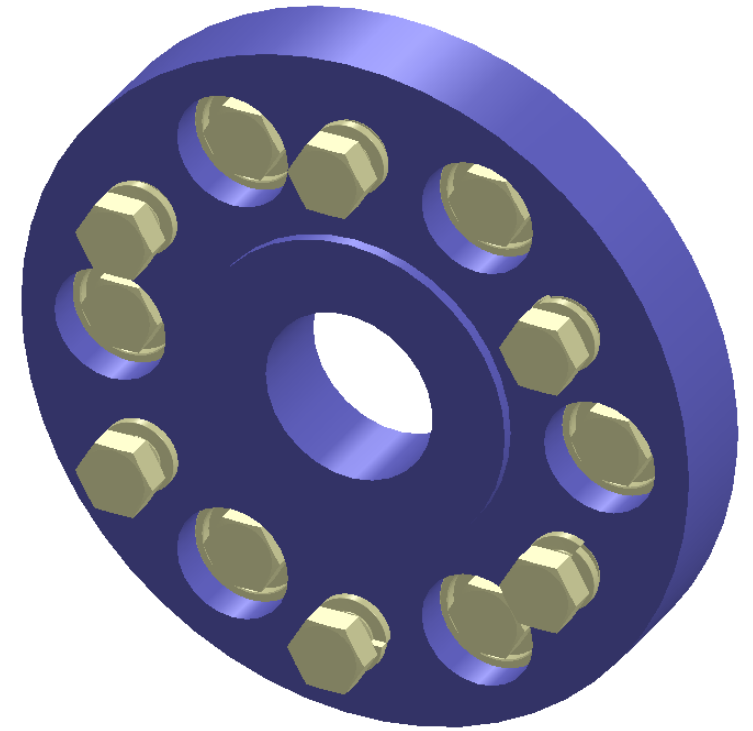

5mm Male Spigot & 6.5mm Female Spigot

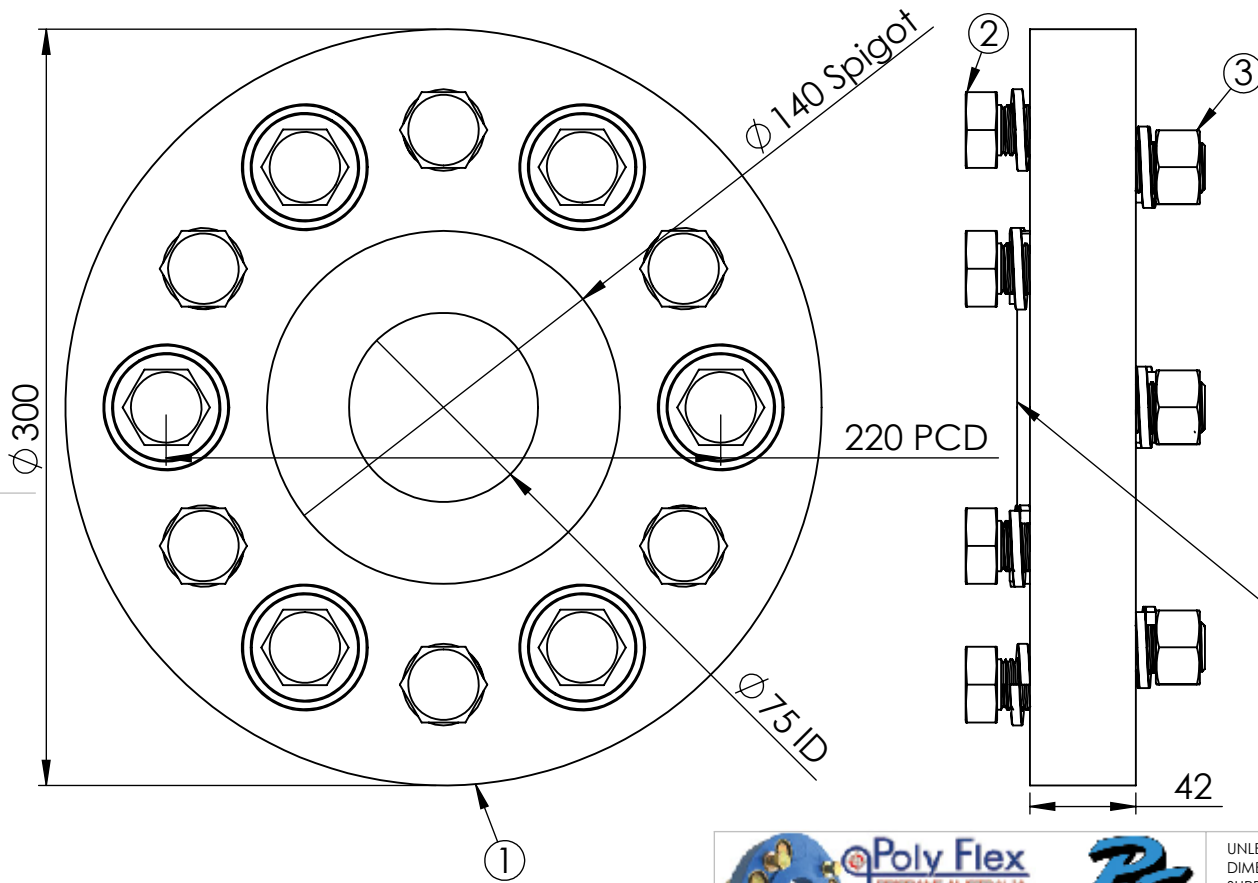

UNLESS OTHERWISE SPECIFIED:
 DIMENSIONS ARE IN MILLIMETERS
 SURFACE FINISH:
 TOLERANCES:
 LINEAR: +/-0.25
 ANGULAR: +/-0.25

DO NOT SCALE DRAWING REVISION A

COMMENTS: Suits: Dong-I DMT 200H, DMT 240H

	NAME	SIGNATURE	DATE
DRAWN	O.Knust		4/06/2013
CHK'D	O.Knust		4/06/2013
APPV'D			
MFG			
Q.A			

Part Number

TITLE:
**Poly Flex Flexible Coupling
 2586-4-95**

MATERIAL:
 95A Urethane

DWG NO. 2586-4-95 Flexible Coupling A4

PROPRIETARY & CONFIDENTIAL
 THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF
 POLY FLEX GROUP PTY LTD. ANY REPRODUCTION IN PART OR AS A WHOLE
 WITHOUT THE WRITTEN PERMISSION OF POLY FLEX GROUP PTY LTD IS PROHIBITED.