


- ① Coupling Disc - ENG Grade polymer alloy (Heat Cured) - 1 off
- ② 5/8"UNC x 2" Bolt & S/W - Bolt Grade 8 HT - 4 off
- ③ 5/8"UNC x 2 1/4" SHCS, S/W & Nut - Bolt Grade 8 HT - 4 off

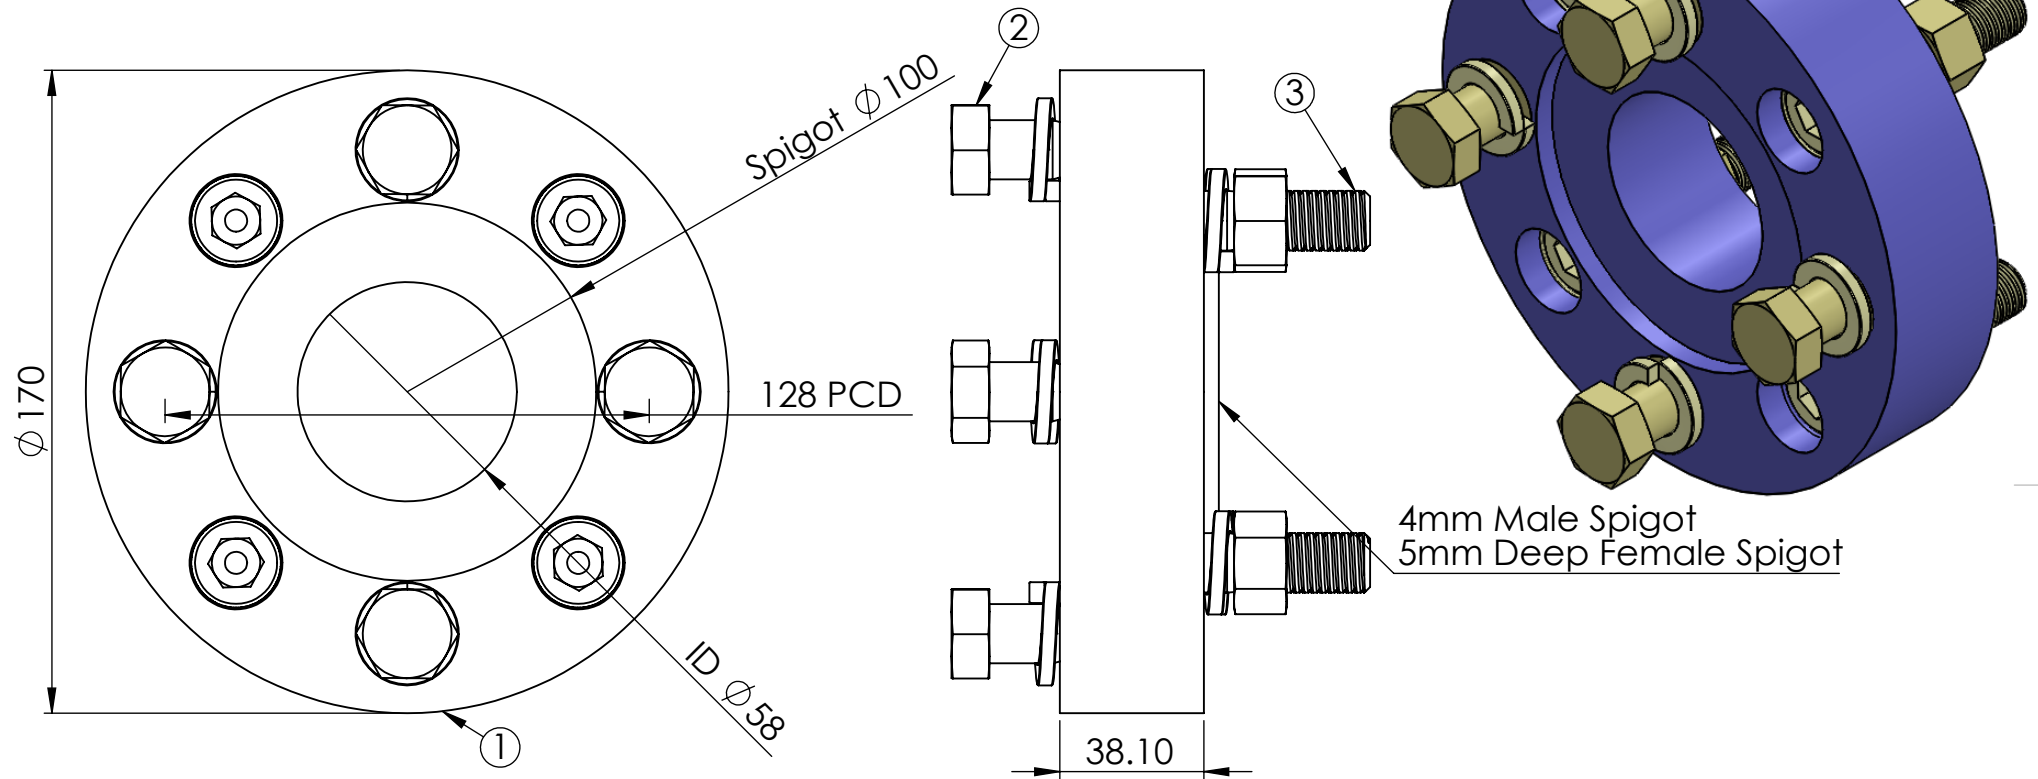

UNLESS OTHERWISE SPECIFIED:
 DIMENSIONS ARE IN MILLIMETERS
 SURFACE FINISH:
 TOLERANCES:
 LINEAR: +/-0.25
 ANGULAR: +/-0.25

DO NOT SCALE DRAWING REVISION A

COMMENTS: Break ALL edges with a 0.25mm chamfer.

TITLE: Suit : DMT50A

DWG NO. 4128-4-95 Flexible Coupling A4

SCALE 1:3 SHEET 1 OF 1

PROPRIETARY & CONFIDENTIAL
 THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF POLY FLEX GROUP PTY LTD. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF POLY FLEX GROUP PTY LTD IS PROHIBITED.
 ©Poly Flex Group Pty Ltd

	NAME	SIGNATURE	DATE
DRAWN	O.Knust		30/06/2016
CHK'D	O.Knust		30/06/2016
APPV'D			
MFG			
Q.A			
Stock			

Part Number
 MATERIAL: 95A Urethane
 WEIGHT: