



- ① Coupling Disc - ENG Grade polymer alloy (Heat Cured) - 1 off
- ② 5/8"UNC x 2 1/4" Grade 8 HT Hex Bolt, Nut & S/W - 8 off
- ③ 5/8"UNC x 1 1/2" Grade 8 Hex Bolt & S/W - 8 off

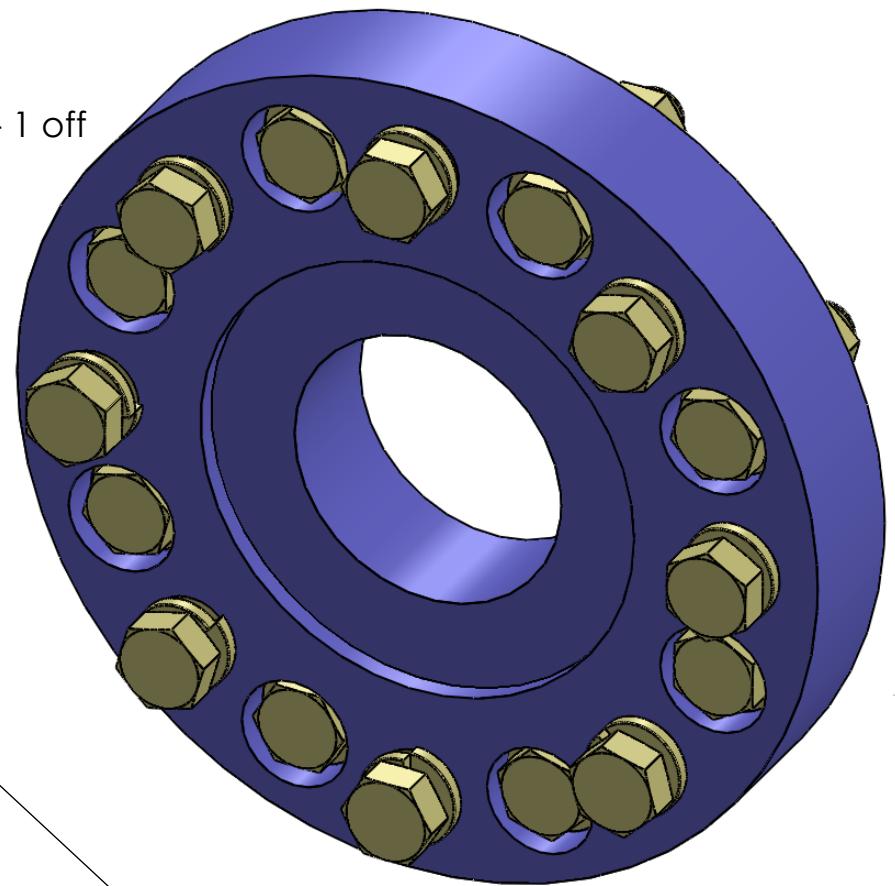

130mm x 6 Deep Female Spigot
130mm x 5mm Male Spigot

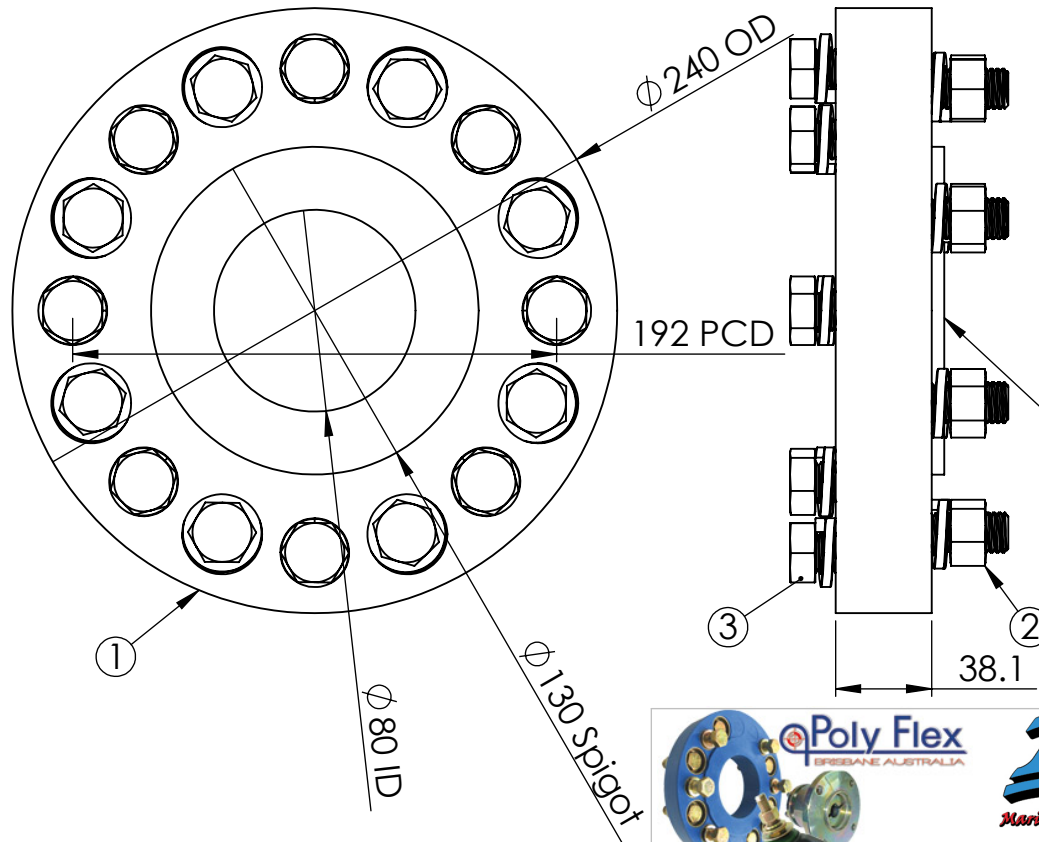

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN MILLIMETERS
SURFACE FINISH:
TOLERANCES:
LINEAR: +/-0.25
ANGULAR: +/-0.25

DO NOT SCALE DRAWING REVISION A

COMMENTS:

TITLE:
**8192-4-95 Flexible Coupling
95A Duro Blue**

	NAME	SIGNATURE	DATE
DRAWN	O.Knust		30/05/2012
CHK'D	O.Knust		30/05/2012
APPV'D			
MFG			
Q.A			

Part Number
MATERIAL:
95A Urethane
WEIGHT:

DWG NO. **8192-4-95 Flexible Coupling**
SCALE:1:5 SHEET 1 OF 1

PROPRIETARY & CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF POLY FLEX GROUP PTY LTD. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF POLY FLEX GROUP PTY LTD IS PROHIBITED.